


DRAWER Marine Refrigerators & Freezers

New Drawer Customization concept:

Indel Webasto Marine provides its customers with even more customization possibilities. On models 49, 55, 65 and 160, it is now possible to customize the door front. The drawer fridge or freezer is supplied with a specifically foamed door ready to be customized, for example, with a real wooden panel supplied by the customer. The panel fixing kit is supplied with the product. Thanks to this new technology it is now possible to select both the finishing of the panel and the handle design, according to the interior of the boat.



- Perfect integration into the interior design
- Optional door panel mounting brackets
- Side-by-side installation of fridge and freezer
- Customizable safety door locks

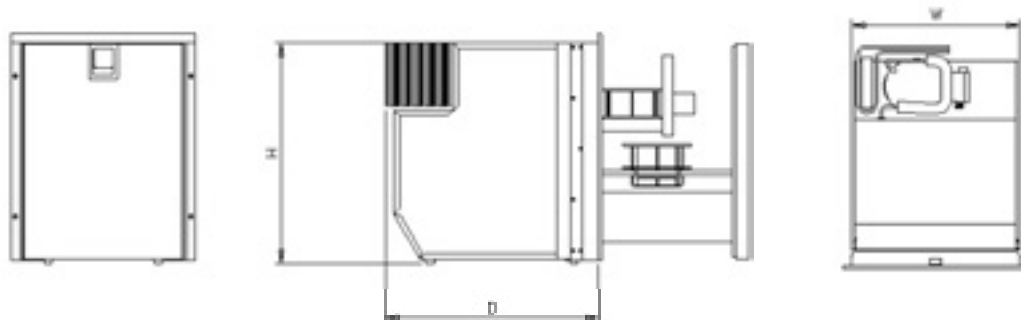

Product Overview: Isotherm Drawer Marine Refrigerators and Freezers

Type	Volume (l)	Dimensions H x W x D (mm) ¹	Weight (kg)	Power consumption* (W / 24 hours)	Danfoss / Secop compressor type
DR 49 INOX	49	520 x 400 x 510	24	400	BD35F
DR 49 GLASS	49	520 x 400 x 510	26	400	BD35F
DR 49 CUSTOM PANEL	49	520 x 385 x 515	23	400	BD35F
DR 55 frost-free FREEZER INOX	55	526 x 470 x 560	26	740	BD35F
DR 55 frost-free FREEZER GLASS	55	526 x 470 x 560	28	740	BD35F
DR 55 frost-free FREEZER CUSTOM PANEL	55	525 x 455 x 570	25	740	BD35F
DR 65 INOX	65	526 x 470 x 545	28	470	BD35F
DR 65 GLASS	65	526 x 470 x 545	30	470	BD35F
DR 65 CUSTOM PANEL	65	525 x 455 x 550	27	470	BD35F
DR 65 frost-free INOX	65	526 x 470 x 560	28	320	BD35F
DR 65 frost-free GLASS	65	526 x 470 x 560	30	320	BD35F
DR 65 frost-free CUSTOM PANEL	65	525 x 455 x 570	27	320	BD35F
DR 85 INOX	85	625 X 495 X 545	32	370	BD35F
DR 105 INOX	105	515 x 515 x 770 ²	33	480	BD35F
DR 130 INOX	130	745 X 545 X 545	35	429	BD35F
DR 160 INOX LIGHT FRIDGE ONLY	155	865 x 627 x 610	44	530	BD50F
DR 160 INOX LIGHT FREEZER ONLY	155	865 x 627 x 590	46	1100	BD80F
DR 160 INOX LIGHT FRIDGE FREEZER	155	865 x 627 x 610	45	1100	BD80F
DR 160 INOX COMBO**	155	865 x 627 x 610	47	1100	AC Compressor
DR 190 INOX	190	800 x 900 x 545	44	700	BD50F

* Power consumption W/24 h in operation at 12 V with + 5°C in the refrigeration space, ambient temperature + 25°C according to the Standards ISO 15502:2005 and EN 153:2006

** Power supply 220 V AC – 50 Hz ¹ With the option of universal AC/DC the depth may increase ² D = 600 without compressor

Drawer 160 CUSTOM PANEL versions are available on demand (fridge only DC, freezer only DC, fridge/freezer DC, combo AC). Dimensions for all versions 865 x 613 x 610 mm